

SAE Type A

- Double sealing action provides even pressure at every point.
- Plated to protect against rust and corrosion.

Unique swivel nut:

- Nut is integral part of clamp to prevent loss.
- Nut remains perfectly aligned with screw.
- Standard zinc plated material; other plating types available at additional cost. (quoted upon request).
- Standard wire diameter: 12 gauge (.1055in +/- .003in) (2.68mm +/- .08mm).


Rated Ultimate Torque: 40in.lbs. (4.5Nm)

Recommended Installation Torque: 20-25in.lbs. (2.3-2.8Nm)


"A" Diameter Range					
SAE NO.	Part NO.	Inches		Millimeters	
		Open*	Closed	Open	Closed
34	102100	1.06	0.94	26.9	23.9
36	102102	1.12	0.99	28.4	25.1
38	102104	1.19	1.06	30.2	26.9
40	102106	1.25	1.12	31.8	28.4
42	102108	1.31	1.16	33.3	29.5
44	102110	1.38	1.19	35.1	30.2
46	102112	1.44	1.25	36.6	31.8
48	102114	1.50	1.31	38.1	33.3
50	102116	1.56	1.38	39.6	35.1
52	102118	1.62	1.44	41.1	36.6
54	102120	1.69	1.50	42.9	38.1
56	102122	1.75	1.56	44.5	39.6
58	102124	1.81	1.62	46.0	41.1
60	102126	1.88	1.69	47.8	42.9
62	102128	1.94	1.75	49.3	44.5
64	102130	2.00	1.81	50.8	46.0
66	102200	2.06	1.88	52.3	47.8
68	102202	2.12	1.94	53.8	49.3
70	102204	2.19	1.97	55.6	50.0
72	102206	2.25	2.03	57.2	51.6
74	102208	2.31	2.12	58.7	53.8
76	102210	2.38	2.19	60.5	55.6
78	102212	2.44	2.25	62.0	57.2
80	102214	2.50	2.28	63.5	57.9
82	102216	2.56	2.34	65.0	59.4
84	102218	2.62	2.41	66.5	61.2
86	102220	2.69	2.47	68.3	62.7

*Sizes larger than shown available upon request


*Open diameter tolerance + .30" (.76), - .000"

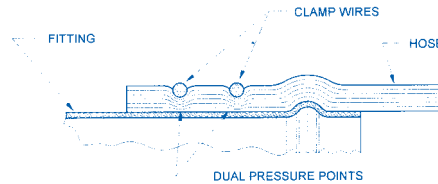

Double Sealing Action

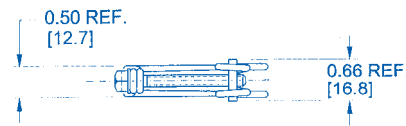

5/16" HEX HEAD



U.S. Patent Numbers
2,536,612
4,414,715
4,592,576

Wire Grip

Clamps

Wire grips are non-stocking parts. Produce & release policy requires firm purchase order and specific release dates.

Packaging: Bulk
Minimum: 500 Units per Part No. per Release
Delivery: Determined at the time of order
Typically: 4 wks ARO—Standard Plating
 6 wks ARO—Special Plating

