


5/16" Wide Worm Drive Clamp- SAE Type "M" Mini Series

- Lightweight, low profile, compact design allows ease of installation in restricted spaces
- 5/16" band width provides significant sealing pressure with low installation torque levels
 - o **MM Series** - stainless steel band and housing, zinc plated carbon screw
 - Ultimate Torque: 20in.lbs.min. (2.3Nm)
 - Installation Torque: 12-15in.lbs. (1.4-1.7Nm)
 - o **MMSS Series** - all stainless steel band, housing and screw
 - Ultimate Torque: 15in.lbs.min. (1.7Nm)
 - Installation Torque: 10-12in.lbs. (1.1- 1.4Nm)
 - o **MMFSS Series** - all 300 series stainless steel band, housing and screw

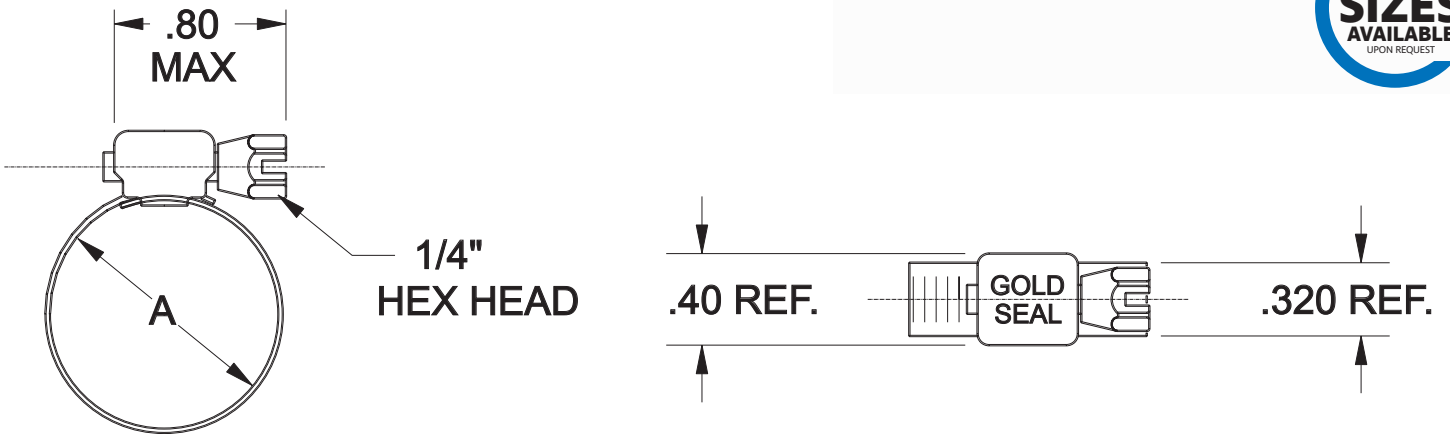

Size Ref.		Part Number		"A" Diameter Range					
No.	Plated Screws	"400" Series Stainless Screws	"300" Series Stainless Screws	Decimals		Inches		Millimeters	
				Min.	Max.	Min.	Max.	Min.	Max.
3	MM 3	MM 3 SS	MMF 3 SS	0.25	0.50	1/4	1/2	6	13
4	MM 4	MM 4 SS	MMF 4 SS	0.25	0.63	1/4	5/8	6	16
6/8	MM 5	MM 5 SS	MMF 5 SS	0.31	0.91	5/16	29/32	8	23
10	MM 10	MM 10 SS	MMF 10 SS	0.56	1.06	9/16	1-1/16	14	27

Available in packed and bulk stock. Other packaging configurations available. Clamps meet or exceed SAE J1508 Type M.